



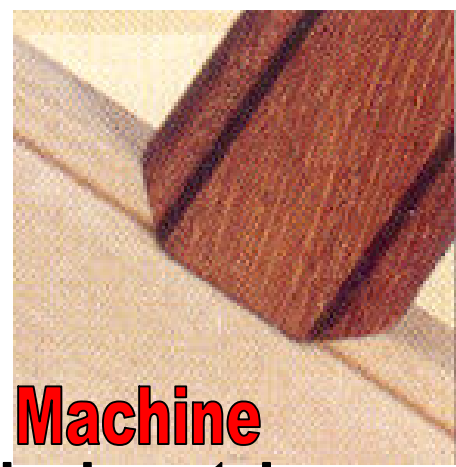


Quality - service and experience
since 1911



MORSØ-NXLEH Notch Cutting Machine


electric/hydraulic dual hand-operated

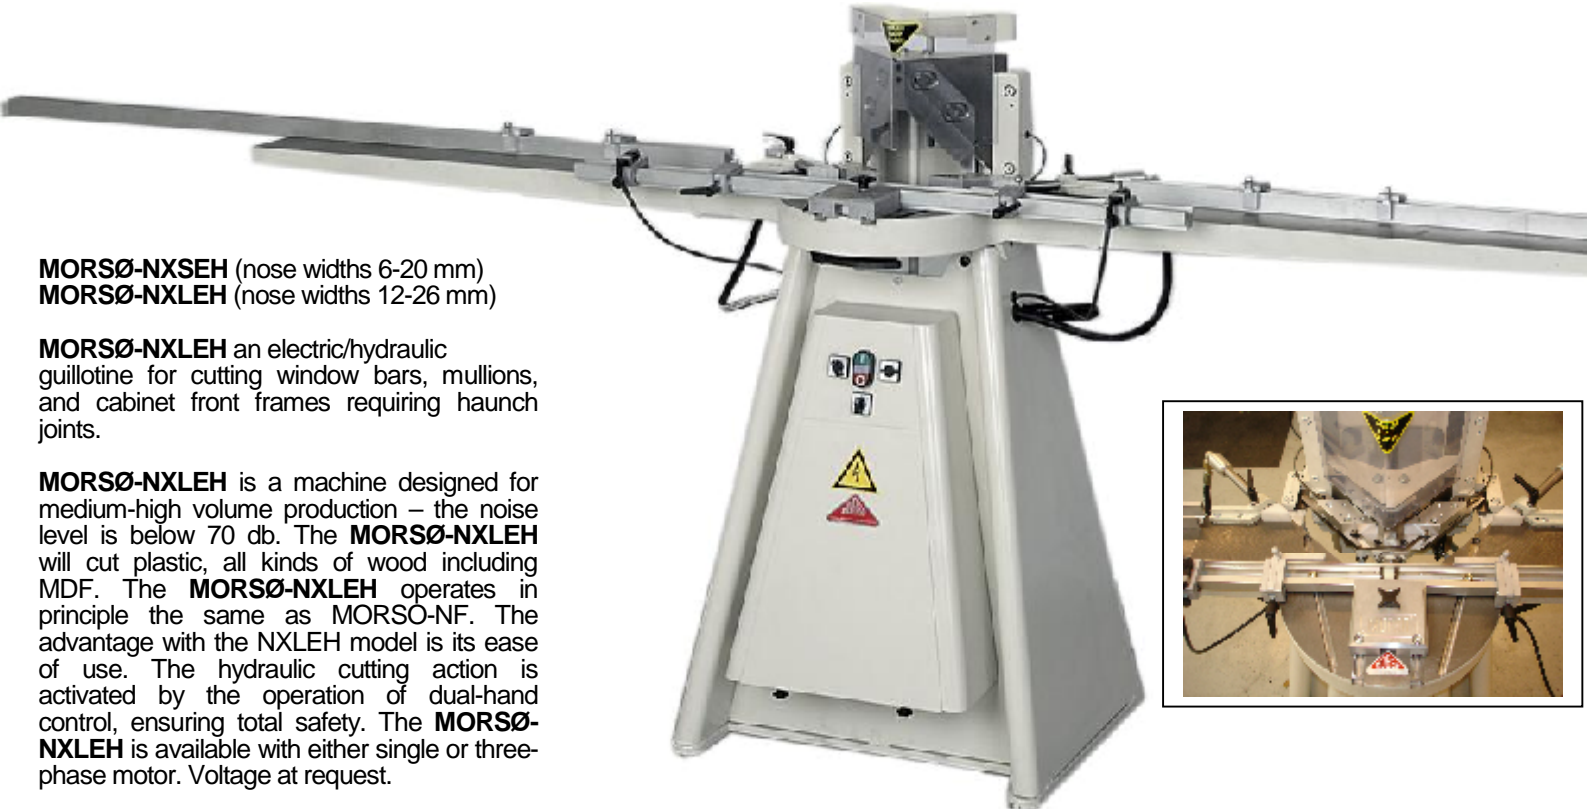

MORSØ-NXSEH (nose widths 6-20 mm)
MORSØ-NXLEH (nose widths 12-26 mm)

MORSØ-NXLEH an electric/hydraulic guillotine for cutting window bars, mullions, and cabinet front frames requiring haunch joints.

MORSØ-NXLEH is a machine designed for medium-high volume production – the noise level is below 70 db. The **MORSØ-NXLEH** will cut plastic, all kinds of wood including MDF. The **MORSØ-NXLEH** operates in principle the same as MORSØ-NF. The advantage with the NXLEH model is its ease of use. The hydraulic cutting action is activated by the operation of dual-hand control, ensuring total safety. The **MORSØ-NXLEH** is available with either single or three-phase motor. Voltage at request.

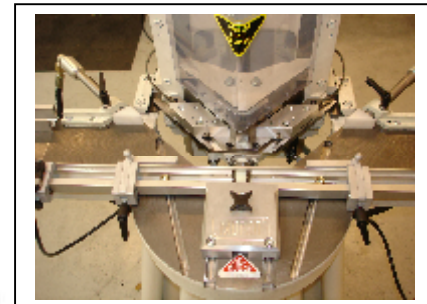

To compare **MORSØ-NXLEH** with a moulding machine the following points must be considered:

1. a cleaner and more constantly accurate cut will be produced with **MORSØ-NXLEH**
2. the **MORSØ-NXLEH** is almost silent by comparison.
3. the **MORSØ-NXLEH** produces no dust and therefore requires no extraction.
4. the **MORSØ-NXLEH** requires less than 15 minutes to change the cutting blades, to the set-up, and to the positioning of the stops.
5. as the blades wear, the 45° angle remains unchanged, ensuring consistently accurate joints.

The **MORSØ-NXLEH** is supplied with the same standard equipment as the **MORSØ-NFX** plus it has:

- Automatic cutting cycles for both large and small work pieces – which means that the machine always does the trim cut which is very important.
- Adjustable length of stroke (2 positions) – when using the lowest cutting position the cutting cycle of two cuts only takes between 1 and 1.5 seconds.

*) Upon request: Fences 2500 mm (100 ") supplied with extra extension table and supporting leg.

Technical Data for MORSØ-NXLEH

Nose widths (Morsø-NXSEH)	6 – 20 mm (1/2" – 1 1/8")	Net weight	141 kilos (310 lbs)
Nose widths (Morsø-NXLEH)	12 – 26 mm (1/4" – 3/4")	Motor, single or three phase	1.1 kW
Cutting width max.	200 mm (8 ")	Pumping capacity	7l/min.
Cutting height max.	145 mm (5.7")	Working pressure	80 bar
Fences, left and right *)	1500 mm (60")	Power transmission	660 kilos
Extension tables, left and right	1000 mm (40")	Tank contents	8 l
US PATENT NOS.: US 6,675,686 BZ - US 6,941,848 BZ		EUROPEAN NO.: 00610130.7-2316	

Dealer:

dan-list^{As}
M A S K I N F A B R I K
Haraldsvej 21 - DK-8960 Randers - Denmark
Tel.: +45 8643 5105 - Fax: +45 8643 5103
e-mail: danlist@danlist.dk - www.danlist.dk