



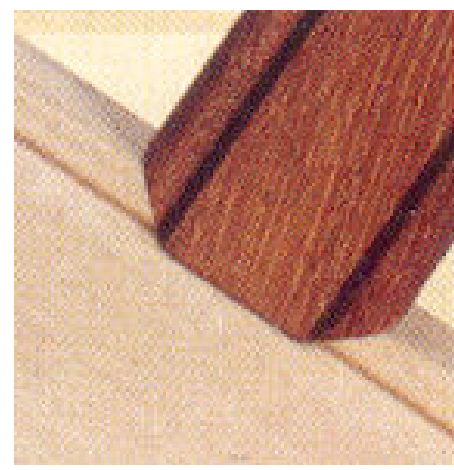

Quality- Service and Experience
since 1911



MORSØ-KS Router


pneumatic/electric

The perfect machine for producing the half-lap joint as found in Georgian window bars. It is used for both "plant-on cassettes" and rebated bars.

MORSØ-KS routing machine is semi-automatic (pneumatic/electric)

MORSØ-KS routing machine is constructed for routing of grooves from 6 - 26 mm wide. Quick adjustment from one size of nose width to another.

It is ideally used in conjunction with the MORSØ-N range of notch cutting machines.

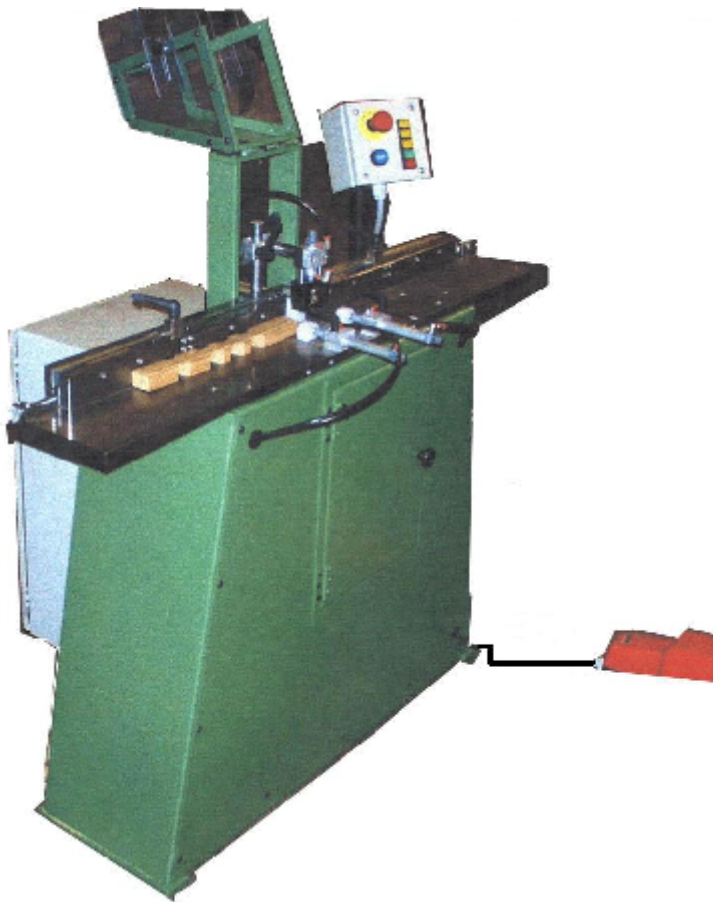

Technical Data

Machine Dimensions	
Length	1250 mm
Width	640 mm
Total Machine Height	1200 mm
Weight	120 kg
Pneumatics:	
Air Pressure	6 – 8 bar
Noise:	
Noise Level	70 dBA
Working Capacity:	
Max. Height of Work Piece	80 mm
Max. Width of Work Piece (with 10 mm cutter)	80 mm
Max Groove Diameter	Ø 26 mm
Motor:	
Three Phase	1.5 kW
Rpm	18000

Distributor:


dan-list
 MASKINFABRIK
 Haraldsvej 21 - DK-8960 Randers - Denmark
 Tel.: +45 8643 5105 - Fax: +45 8643 5103
 e-mail: danlist@danlist.dk - www.danlist.dk