




Quality, Service, and Experience
since 1911

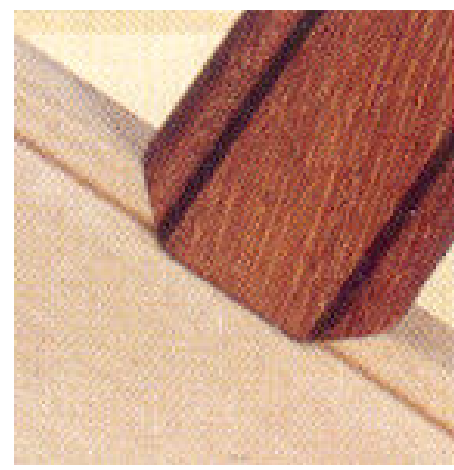

MORSØ-KSD Routing Machine

manual/electric




The perfect machine for producing the half-lap joint as found in Georgian window bars. It is used for both “plant-on cassettes” and rebated bars.

MORSØ-KSD routing machine is with manual feed and clamping. The motor is single phase 220 V.

MORSØ-KSD routing machine is constructed for routing of grooves from 6 - 20 mm wide and up to 20 mm deep. Quick adjustment from one size of nose width to another.

It is ideally used in conjunction with the MORSØ-N range of notch cutting machines.



Technical Data	
Machine Dimensions:	
Length	660 mm
Width	460 mm
Total Machine Height	1200 mm
Height Stand	760 mm
Weight	49 kg
Noise:	
Noise Level	70 dBA
Working Capacity:	
Max. Height of Work Piece	55 mm
Max. Width of Work Piece (with 10 mm cutter)	50 mm
Max. Groove Depth	20 mm
Max Groove Diameter	Ø 20 mm
Motor:	
Single Phase	0,860 kW
Rpm	29000

Distributor: