


FRAME ASSEMBLING MACHINE MODEL UP-AKS

AUTOMATIC, PNEUMATIC FLOOR MODEL

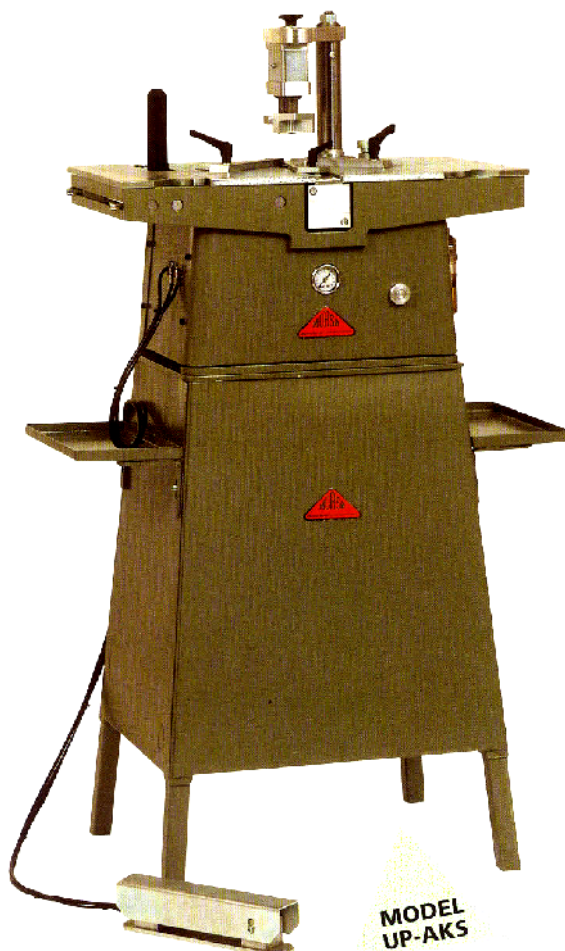

The **MORSØ-UP-AKS** is an automatic, pneumatic floor model, which is operated by two hand release and a pneumatic foot pedal. Therefore the **MORSØ-UP-AKS** is absolutely safe to operate. In order to get the MORSØ UP-AKS running just connect two mains, as a compressor is built in, and therefore delivered with the **MORSØ UP-AKS**.

Standard equipment for the machine:

- Two stops for min. and max. wedge position
- Single pressure pad for plain mouldings
- Two double pressure pads for mouldings with different profiles
- Frontal Clamp device holding the corners tightly together to create a perfect joint
- Adjustable fences for all angles, i.e. for rectangular, hexagonal and octagonal frames.
- Built-in support arms for long mouldings
- Two refillable solid-steel cartridges for 7 and 10 mm wedges, respectively.
- Air filter
- Oil lubricator
- Stand, adjustable in height
- Compressor
- 1 box of 7 mm wedges (5000 pcs)
- 1 box of 10 mm wedges (3000 pcs)

ACCESSORIES:

Solid Steel cartridges

in 7 and 10 mm as standard.
Also available in 5 and 12 mm.



2 double Pressure Pads

one for mouldings with a standard profile and one for mouldings with a reversed profile. They are padded with synthetic fibres in order to leave no marks at all on the frame.



1 flat pressure pad for mouldings with a plain surface. As with the double pressure pads, this one is also padded with synthetic fibres to protect the frame.



Wedges:

- 5 mm – 1 box 5000 pcs
- 7 mm – 1 box 5000 pcs
- 10 mm – 1 box 3000 pcs
- 12 mm – 1 box 3000 pcs

TECHNICAL DATA FOR MODEL UP-AKS

Air pressure, bar	6-8
Wedge size	5, 7, 10 and 12 mm
Thickness of moulding, min.	6 mm (1/4")
Thickness of moulding, max.	65 mm (2 1/2")
Width of moulding, min.	6 mm (1/4")
Width of Moulding, max	150 mm (6")
Distance between wedges, max.	130 mm (5")
Height, Working Bench	272 mm (11")
Machine Dimension	575x330x490 mm
Length x Width x Height	(22x13x19")
Weight	95 kilos (209 lbs)
Compressor 75/150	
Voltage	220/110 V
Output	78l/min.
Capacity	15 litres
Air pressure, max.	8 bar
Stand Dimension:	
Min. Height	570 mm (22")
Max. Height	800 mm (31")
Width	500 mm (20")
Length	415 mm (16")
Shelf	2 @
Width x Length	150 x 320 mm (6 x 13")